

RF DC Block Protector, 698-2700 MHz, Type N M-F

DCB-COM-NMF



• DCB-COM-NMF

N Male Connector on Surge and N Female Protected Side

The DCB series surge arrester is a RF broadband device designed for surge and lightning protection applications where DC Block is required. A DC Blocking device with its internal series capacitor circuit. This DCB unit offers excellent surge / lightning suppression for telecommunications systems.

The DCB series demonstrates excellent RF characteristics

FEATURES:

- Broad Band Design
- Excellent Insertion Loss and Return Loss Characteristics Over Frequency Range
- DC Block
- Multi-Strike Capability
- Surge Current of 40kA
- Max Power 750W RMS
- RoHS & CE Compliant
- Bulkhead Mounting
- IP67 Rated

APPLICATIONS:

- Public Safety Systems
- 4G/5G Cellular Systems
- Emergency Response Systems
- Other Wireless Applications that Require DC Block to Equipment

RF Specifications

Impedance	50 Ω
Frequency	698 – 2700 MHz
VSWR/Return Loss (Over Frequency)	$\leq 1.15:1$ Max / 23.1 dB
Insertion Loss (Over Frequency)	≤ 0.2 dB to ≤ 2700 MHz
Maximum RF Power	750W RMS Average

Transient Specifications

Protection Circuit	DC Block
Surge Current	IEC 61000-4-5 8/20 μ s Waveform
Maximum Surge	50 kA (1x)
Multi-Strike	20 kA Multiple (10x)
Let-Through Energy	$\leq 10\mu$ J $\pm 20\%$ @ 20kA 8/20 μ s Waveform
Let-Through Voltage	≤ 10 VDC $\pm 20\%$ @20kA 8/20 μ s Waveform




Australian Representatives
ROJONE, PTY LTD.
Tel: 02 9829 1555
E: sales@rojone.com.au
www.rojone.com.au

RF DC Block Protector, 698-2700 MHz, Type N F-M

Mechanical / Environmental Specifications		Material & Finish Specifications		
Storage / Operational Temp	-50°C to +85°C	Component	Material	Finish
Ingress Protection	IP67 IEC 60529	Outer Parts	Aluminum	Ball Burnish
Bellcore	TA-NWT-000487	Connectors	Brass	Tri-Metal
Weight	5.2 oz (147.4 g)	Coupling Nut & Washer	SST	---
RoHS Compliant	Yes	Center Contact	Be Cu / Brass	Gold
CE	Yes	Insulator	PTFE	---

Mechanical Outlines

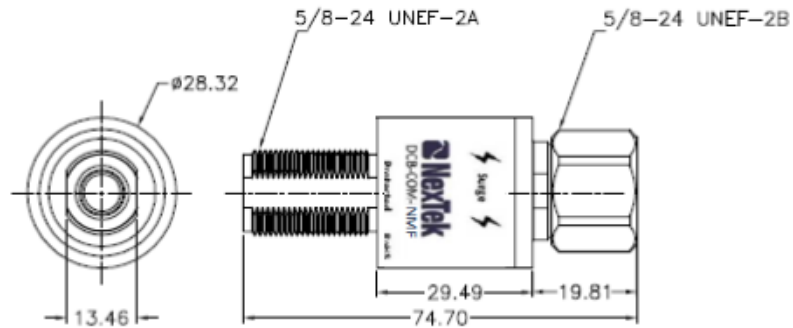

Hardware Kit Included

Item	Description	Qty
1	5/8"-24 HEX NUT	1
2	5/8" INTERNAL LOCK WASHER	1
3	'O'-RING 019 SILICONE	1