


LTR	DESCRIPTION	DATE	BY
-	Released	1/20/95	JCL
A	Obsolete – use 3190-1550 (EZ-900-716FC-2)	11/28/07	JCL

OBSOLETE

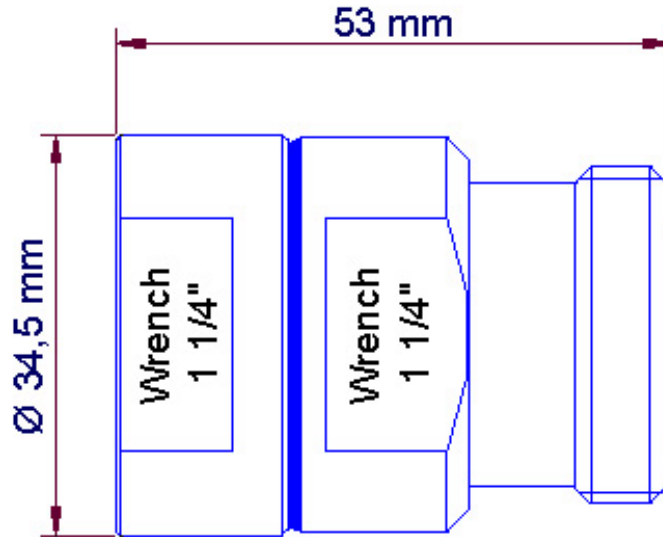

I. MATERIALS & FINISHES

- center contact: Silver Plated Brass
- outer contact: Silver Plated Brass
- body: Silver Plated Brass
- backnut: Nickel Plated Copper
- dielectric: Teflon® PTFE
- gaskets: Nitrile Rubber
- attachment: braid clamp

II. ELECTRICAL PROPERTIES

- impedance: 50 ohms
- working voltage: 1000 vrms (max)
- vswr: 1.15:1 (max) up to 3 GHz
- insertion loss: 0.10 x \sqrt{Fghz}


Australian Representatives
ROJONE, PTY LTD.
 Tel: 02 9829 1555
 E: sales@rojone.com.au
 www.rojone.com.au

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

Approvals		
Drawn	JCL	1/20/95


TIMES MICROWAVE SYSTEMS
 Wallingford, CT 06492
 (203) 949-8400; (203) 949-8423.Fax
 www.timesmicrowave.com

EZ-900-716FC
Type-716 DIN male (plug) – Non-Solder Pin
for LMR-900 Cable

Size A	CAGE CODE 68999	Drawing No.: 3190-334
--------	---------------------------	---------------------------------

Scale: NA	Rev. (A)	Sheet: 1 of 1
-----------	----------	---------------