


LTR	DESCRIPTION	DATE	BY
-	Released	2/5/02	JCL
A	Re-numbered from 1586 to 1585	3/31/06	JCL

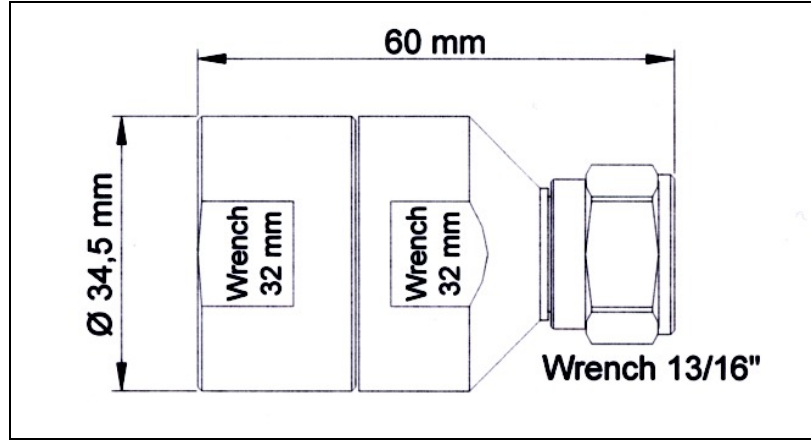

I. MATERIALS & FINISHES

- center contact: Silver (50u") Plated Brass
- outer contact: Silver (50 u") Plated Brass
- coupling nut: Nickel (50 u") Plated Brass
- body: Silver (50 u") Plated Brass
- backnut: Nickel (50 u") Plated Copper
- dielectric: Teflon® PTFE
- gaskets: Nitrile Rubber
- attachment: braid clamp

II. ELECTRICAL PROPERTIES

- impedance: 50 ohms
- working voltage: 1000 vrms (max)
- vswr: 1.15:1 (max) up to 3 GHz
- insertion loss: 0.10 x √Fghz



Australian Representatives
ROJONE, PTY LTD.
 Tel: 02 9829 1555
 E: sales@rojone.com.au
 www.rojone.com.au

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

Approvals		
Drawn	JCL	2/5/02



TIMES MICROWAVE SYSTEMS
 Wallingford, CT 06492
 (203) 949-8400; (203) 949-8423.Fax
 www.timesmicrowave.com

EZ-900-NMC-PL-2

Two Piece Type-N male (plug) – Non-Solder Pin
for LMR-900-LLPL Cable

Size A	CAGE CODE 68999	Drawing No.: 3190-1585
Scale: NA	Rev. (A)	Sheet: 1 of 1