





Flexible Waveguides Technical Data Sheet

PE-W112SF006-12

Features

- WR-112 waveguide
- Flexes in both the E and H plane
- 7.05 GHz to 10 GHz Frequency Range

- · Brass flanges with a silver plated brass body
- Neoprene sleeve provides added protection and mechanical support

Applications

- Allows expansion/contraction due to thermal issues.
- Test Benches

- · Microwave Radio
- Eliminates installation problems caused by misalignment.
- Pressurized waveguide systems
- Provides vibration isolation

Description

The PE-W112SF006-12 is part of Pasternack's family of flexible, seamless waveguides which operates in the 7.05 to 10 GHz range. The waveguide body is made of silver plated brass. It can be bent in both the E and H planes without impairing VSWR or attenuation. The waveguide is covered by a neoprene jacket which protects the waveguide and provides mechanical support.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	7.05		10	GHz
VSWR		1.07:1		
Insertion Loss		0.08		dB
Input Power			4	KWatts
Peak Power			315	KWatts


Mechanical Specifications

Waveguide Size
WR-112
Waveguide Design
Seamless
Section Length
E-Plane Minimum Bend Radius, One Time
H-Plane Minimum Bend Radius, One Time
Maximum Operating Pressure
WR-112
Seamless
12 [in [304.8 mm]]
0.98 in [24.89 mm]
1.77 in [44.96 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-112 Seamless Flexible Waveguide 12 Inch, CPR-112G Flange Operating From 7.05 GHz to 10 GHz PE-W112SF006-12

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451







Flexible Waveguides Technical Data Sheet

PE-W112SF006-12

Description	Flange 1	Waveguide	Flange 2	
Туре	CPR-112G	WR-112	CPR-112G	
Designation	None		None	
Material	Brass	Brass	Brass	
Plating		Silver		
Color	Gold	Black	Gold	


Environmental Specifications

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

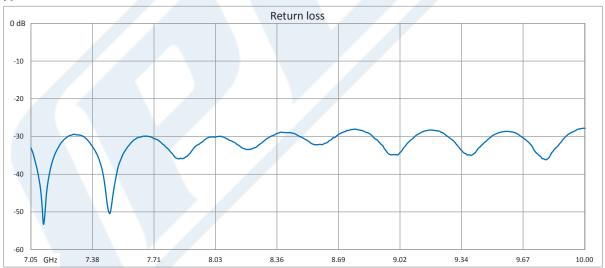

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-112 Seamless Flexible Waveguide 12 Inch, CPR-112G Flange Operating From 7.05 GHz to 10 GHz PE-W112SF006-12




WR-112 Seamless Flexible Waveguide 12 Inch, CPR-112G Flange Operating From 7.05 GHz to 10 GHz



Flexible Waveguides Technical Data Sheet

PE-W112SF006-12

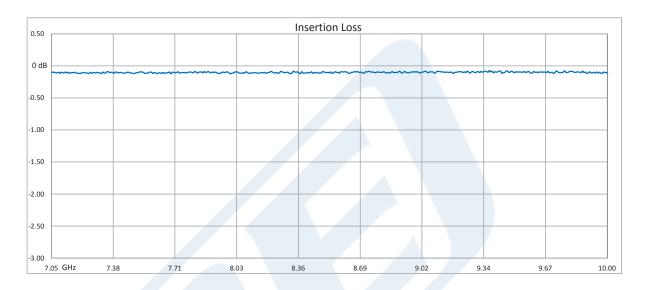

WR-112 Seamless Flexible Waveguide 12 Inch, CPR-112G Flange Operating From 7.05 GHz to 10 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-112 Seamless Flexible Waveguide 12 Inch, CPR-112G Flange Operating From 7.05 GHz to 10 GHz PE-W112SF006-12

URL: https://www.pasternack.com/wr112-seamless-flexible-waveguide-cpr-112g-7.05-10-ghz-pe-w112sf006-12-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451

PE-W112SF006-12 CAD Drawing

WR-112 Seamless Flexible Waveguide 12 Inch, CPR-112G Flange Operating From 7.05 GHz to 10 GHz

