



# WR-34 Waveguide Standard Gain Horn Antenna Operating From 22 GHz to 33 GHz With a Nominal 20 dBi Gain With UG-1530/U Square Cover Flange

## Gain Horns Technical Data Sheet

PE9851A-20

### Features

- Rectangular Waveguide Interface
- 22 GHz to 33 GHz
- 20 dBi Nominal Gain
- UG-1530/U Square Cover Flange

### Applications

- Antenna Measurements
- Wireless Communication
- Laboratory Use
- Microwave Radio Systems

### Description

Pasternack's PE9851A-20 WR-34 waveguide standard gain horn antenna operating from 22 GHz to 33 GHz with a nominal 20 dBi gain is part of our full line of RF components available for same-day shipping. This Pasternack pyramidal horn antenna has a lightweight anodized aluminum body and a precision tolerance UG-1530/U square cover flange. The PE9851A-20 WR-34 waveguide standard gain horn antenna offers low gain variation across its operating frequency range and 17.4 degrees of half power beam width.

Waveguide standard gain horn antennas are used in a wide variety of applications due to their high power handling capability, low loss, high directivity, and near constant electrical performance across a broad bandwidth. Pasternack's WR-34 standard gain horns are available in 10, 15 and 20 dB models with pyramidal shape and rectangular waveguide input.

### Configuration

Design	WR-34 Standard Gain Horn
Pattern	Directional
Polarization	Linear

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	22		33	GHz
Nominal Gain		20		dBi
Horizontal Half Power Beam Width		17.4		Degrees
Vertical Half Power Beam Width		17		Degrees

Electrical Specification Notes:  
 Half power beam width is calculated by computer simulation.

### Mechanical Specifications

<b>Size</b>	
Length	3.51 in [89.15 mm]
Width	1.86 in [47.24 mm]
Height	1.4 in [35.56 mm]
Weight	0.094 lbs [42.64 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-34 Waveguide Standard Gain Horn Antenna Operating From 22 GHz to 33 GHz With a Nominal 20 dBi Gain With UG-1530/U Square Cover Flange PE9851A-20](#)



WR-34 Waveguide Standard Gain Horn Antenna  
Operating From 22 GHz to 33 GHz With a Nominal  
20 dBi Gain With UG-1530/U Square Cover Flange

Gain Horns Technical Data Sheet

PE9851A-20

**Waveguide Interface**

Waveguide Size	WR-34
Flange Type	Square Cover
Flange Designation	UG-1530/U
Body Material and Plating	Anodized Aluminum, Paint

**Environmental Specifications**

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

WR-34 Waveguide Standard Gain Horn Antenna Operating From 22 GHz to 33 GHz With a Nominal 20 dBi Gain With UG-1530/U Square Cover Flange from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.







Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-34 Waveguide Standard Gain Horn Antenna Operating From 22 GHz to 33 GHz With a Nominal 20 dBi Gain With UG-1530/U Square Cover Flange PE9851A-20](#)

URL: <https://www.pasternack.com/wr-34-waveguide-gain-horn-antenna-20dbi-ug-1530-square-flange-pe9851a-20-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE9851A-20 CAD Drawing

WR-34 Waveguide Standard Gain Horn Antenna Operating From 22 GHz to 33 GHz With a Nominal 20 dBi Gain With UG-1530/U Square Cover Flange

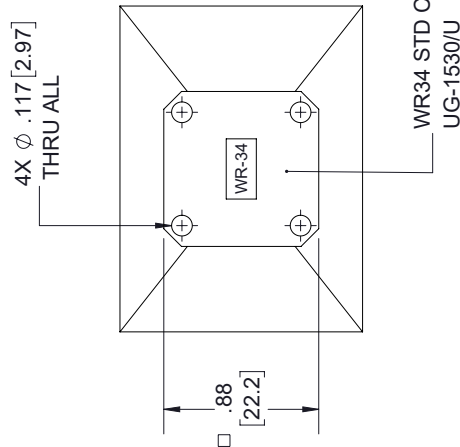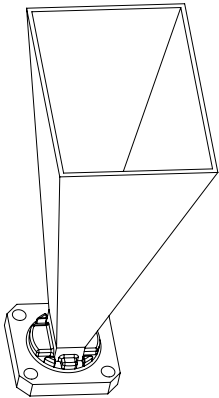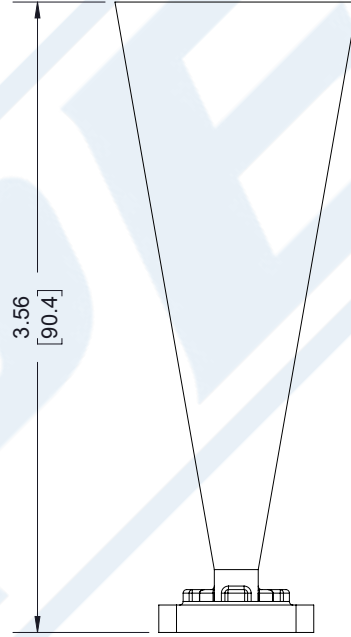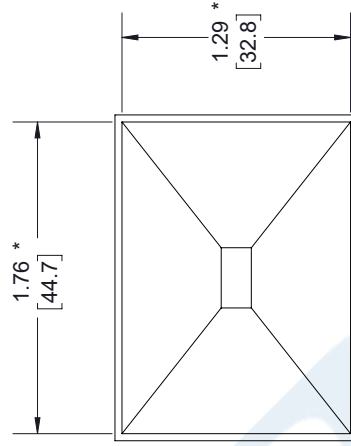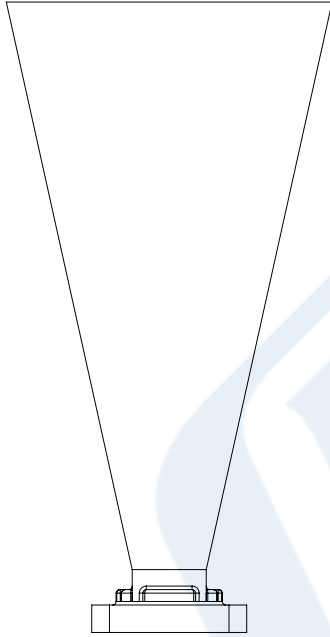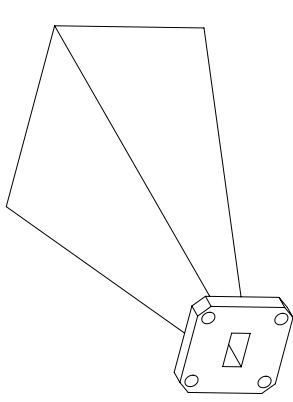

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.03
.XXX	±0.005

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

\* INSIDE DIMENSION

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE	PE9851A-20
CAGE CODE	53919
CAD FILE	111517
SCALE	N/A
SIZE	A
	7361

**PE PASTERNAK®**  
 THE ENGINEER'S RF SOURCE  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com