

WR-187 Waveguide Standard Gain Horn Antenna Operating From 3.95 GHz to 5.85 GHz With a Nominal 15 dBi Gain With CMR-187 Flange



Gain Horns Technical Data Sheet

PE9861-15

Features

- Rectangular Waveguide Interface
- 3.95 GHz to 5.85 GHz

- 15 dBi Nominal Gain
- CMR-187 Flange

Applications

- Antenna Measurements
- Wireless Communication
- Laboratory Use
- · Microwave Radio Systems

Description

Pasternack's PE9861-15 WR-187 waveguide standard gain horn antenna operating from 3.95 GHz to 5.85 GHz with a nominal 15 dBi gain is part of our full line of RF components available for same-day shipping. This Pasternack pyramidal horn antenna has a lightweight anodized aluminum body and a precision tolerance CMR-187 flange. The PE9861-15 WR-187 waveguide standard gain horn antenna offers low gain variation across its operating frequency range and 33.8 degrees of half power beam width.

Waveguide standard gain horn antennas are used in a wide variety of applications due to their high power handling capability, low loss, high directivity, and near constant electrical performance across a broad bandwidth. Pasternack's WR-187 standard gain horns are available in 10, 15 and 20 dB models with pyramidal shape and rectangular waveguide input.

Configuration

Design

Pattern Polarization WR-187 Standard Gain Horn

Directional Linear

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	3.95		5.85	GHz
Nominal Gain		15		dBi
Horizontal Half Power Beam Width		33.3		Degrees
Vertical Half Power Beam Width		33.8		Degrees
Torriban Flam Forto: Dodin Fridan		00.0		209.00

Electrical Specification Notes:

Half power beam width is calculated by computer simulation.

Mechanical Specifications

Size

 Length
 9.4 in [238.76 mm]

 Width
 4.88 in [123.95 mm]

 Height
 3.57 in [90.68 mm]

 Weight
 0.748 lbs [339.29 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-187 Waveguide Standard Gain Horn Antenna Operating From 3.95 GHz to 5.85 GHz With a Nominal 15 dBi Gain With CMR-187 Flange PE9861-15

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com



WR-187 Waveguide Standard Gain Horn Antenna Operating From 3.95 GHz to 5.85 GHz With a Nominal 15 dBi Gain With CMR-187 Flange



Gain Horns Technical Data Sheet

PE9861-15

Waveguide Interface

Waveguide Size Flange Type Body Material and Plating WR-187 CMR-187 Anodized Aluminum, Paint


Environmental Specifications

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

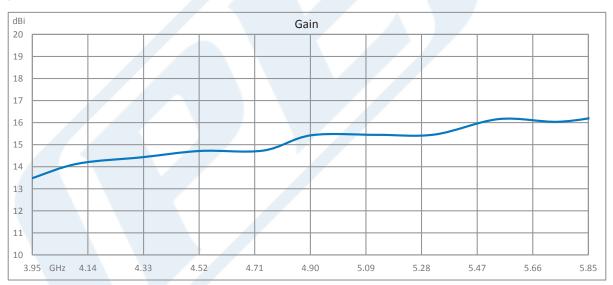

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-187 Waveguide Standard Gain Horn Antenna Operating From 3.95 GHz to 5.85 GHz With a Nominal 15 dBi Gain With CMR-187 Flange PE9861-15

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623

Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com



WR-187 Waveguide Standard Gain Horn Antenna Operating From 3.95 GHz to 5.85 GHz With a Nominal 15 dBi Gain With CMR-187 Flange



Gain Horns Technical Data Sheet

PE9861-15

WR-187 Waveguide Standard Gain Horn Antenna Operating From 3.95 GHz to 5.85 GHz With a Nominal 15 dBi Gain With CMR-187 Flange from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-187 Waveguide Standard Gain Horn Antenna Operating From 3.95 GHz to 5.85 GHz With a Nominal 15 dBi Gain With CMR-187 Flange PE9861-15

URL: https://www.pasternack.com/standard-gain-horn-waveguide-size-wr187-pe9861-15-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE9861-15 CAD DrawingWR-187 Waveguide Standard Gain Horn Antenna Operating From 3.95 GHz to 5.85 GHz With a Nominal 15 dBi Gain With CMR-187 Flange

