


THE REVISION STATUS OF ALL SHEETS OF THIS DRAWING IS THE SAME AS SHEET 1

LTR	DESCRIPTION	DATE	BY
-	Released	8/20/03	JCL
A	Changed Coupling Nut & Rear Body Design	11/1/05	JCL

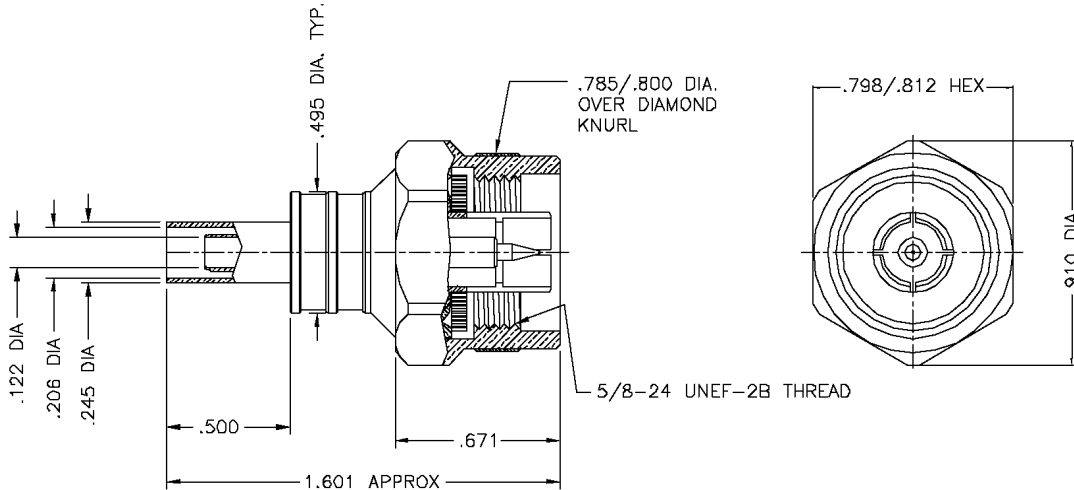

I. MATERIALS & FINISHES

- center contact: Gold Plated Brass
- outer contact: Alballoy Plated Brass
- coupling nut: Alballoy Plated Brass
- body: Alballoy Plated Brass
- crimp sleeve: Silver Plated Copper
- dielectric: Teflon® PTFE
- gasket: Silicone Rubber
- shrink sleeve: Adhesive Lined Polyolefin
- attachment: braid crimp (.213"hex)

II. ELECTRICAL PROPERTIES

- impedance: 50 ohms
- working voltage: 1000 vrms (max)
- vswr: 1.25:1 (max) up to 3 GHz
- insertion loss: 0.10 x √Fghz

Australian Representatives
ROJONE, PTY LTD.
 Tel: 02 9829 1555
 E: sales@rojone.com.au
 www.rojone.com.au

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

Approvals		
Drawn	JCL	8/20/03

Wallingford, CT 06492
 (203) 949-8400; (203) 949-8423.Fax
 www.timesmicrowave.com

TC-195-NM

Type-N male (plug) with Hex/Knurl Coupling Nut for LMR-195 Cable

Size	CAGE CODE	Drawing No.:
A	68999	3190-1555A

Scale: NA	Rev. (A)	Sheet: 1 of 1
-----------	----------	---------------