


NOTICE OF PROPRIETARY RIGHTS THIS DOCUMENT CONTAINS CONFIDENTIAL TECHNICAL DATA, INCLUDING TRADE SECRETS, PROPRIETARY TO TIMES MICROWAVE SYSTEMS. DISCLOSURE OF THIS DATA IS EXPRESSLY CONDITIONED UPON YOUR ASSENT THAT ITS USE IS LIMITED TO USE WITHIN YOUR COMPANY ONLY. ANY OTHER USE IS STRICTLY PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF TIMES MICROWAVE SYSTEMS.

SYM	REVISION DESCRIPTION	DFTM	DATE	APPD	DATE
A	RELEASED FOR PRODUCTION	J.P.	6/7/95	J.P.	6/7/95
B	CHANGED PER CDC #44522	D.J.H.	5/17/16	J.D.B.	5/17/16

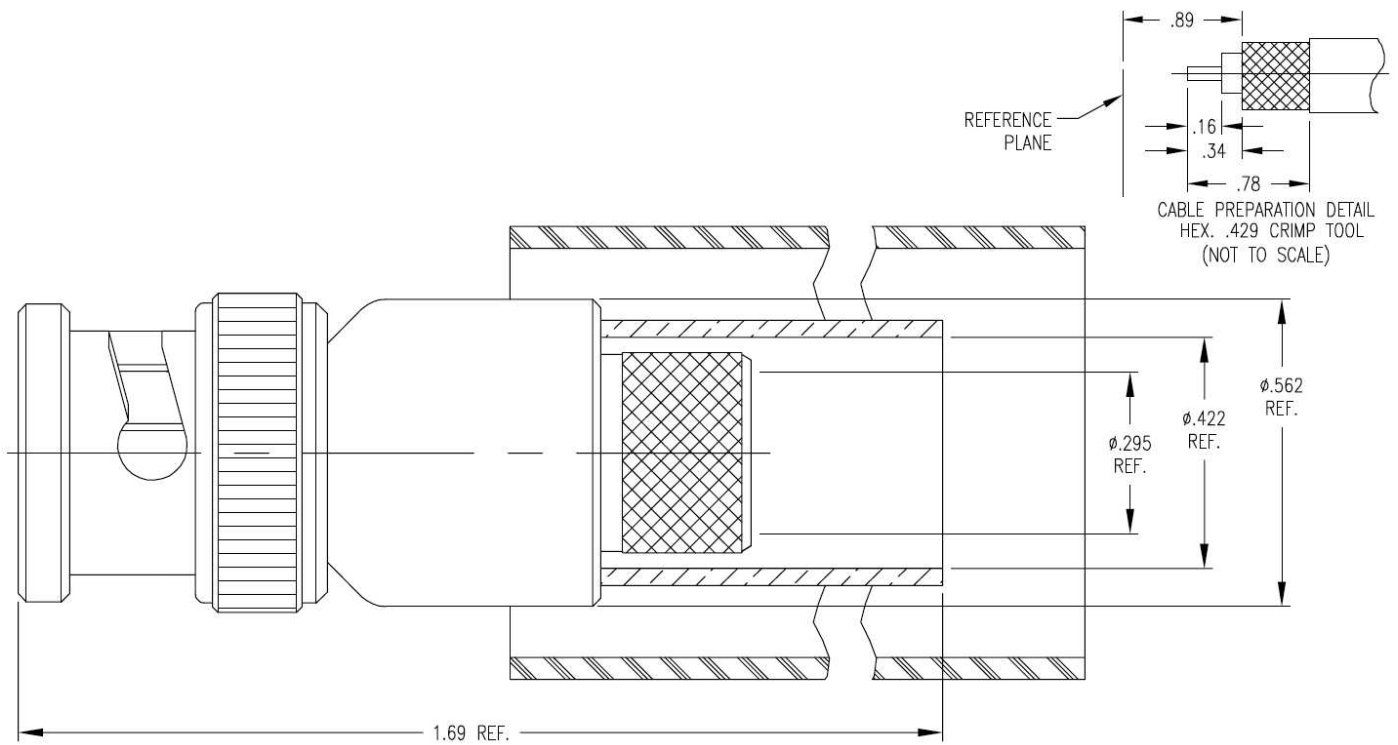

- | | |
|---|--|
| 1.0 PERFORMANCE | 2.3 CRIMP FERRULE: Cu |
| 1.1 FREQUENCY RANGE: DC-4GHz | 2.4 SPRING WASHERS: BeCu |
| 1.2 NOMINAL IMPEDANCE: 50 OHMS | 2.5 ALL OTHER METAL PARTS: BRASS |
| 1.3 DWV: 1500 V RMS @ 60 Hz (sea level) | 2.6 GASKET: SI RUBBER |
| 1.4 TEMPERATURE RANGE: -65°C TO +165°C | 2.7 SHRINK SLEEVE: THICK WALL POLYOLEFIN |
| 2.0 MATERIALS | 3.0 FINISHES |
| 2.1 DIELECTRIC: TEFLON | 3.1 CONTACT: SILVER PLATED |
| 2.2 CONTACT: BRASS | 3.2 ALL OTHER METAL PARTS: NICKEL PLATED |
| | 4.0 MECHANICAL |
| | 4.1 INTERFACE IN ACCORDANCE WITH MIL-STD-348 |


Australian Representatives
ROJONE, PTY LTD.
 Tel: 02 9829 1555
 E: sales@rojone.com.au
 www.rojone.com.au

MATERIAL:	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES MACHINED SURFACES FINISH 63 RMS MAX. REMOVE ALL BURRS .005 MAX. BREAK MACHINE CORNERS .005 MAX. FILLET R. TOLERANCES ON DECIMALS .XX ± .01 .XXX ± .005 ANGLES ± 1° FRACTIONS ± 1/64	DFTM. J.P.	TIMES MICROWAVE SYSTEMS
		DATE 6/7/95	
USED ON: C		CHKD. J.P.	TC-400-BM BNC MALE FOR LMR-400 CABLE SOLDER/CRIMP
		DATE 6/7/95	
SCALE: NONE	DWG. SIZE A	APPD. J.P.	SHEET 1 of 1 SD3190-318 REV B
		DATE 6/7/95	
DO NOT SCALE DRAWING	CODE IDENT 68999		