



**NOTICE OF PROPRIETARY RIGHTS** THIS DOCUMENT CONTAINS CONFIDENTIAL TECHNICAL DATA, INCLUDING TRADE SECRETS, PROPRIETARY TO TIMES MICROWAVE SYSTEMS. DISCLOSURE OF THIS DATA IS EXPRESSLY CONDITIONED UPON YOUR ASSENT THAT ITS USE IS LIMITED TO USE WITHIN YOUR COMPANY ONLY. ANY OTHER USE IS STRICTLY PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF TIMES MICROWAVE SYSTEMS.

SYM	REVISION DESCRIPTION	DFTM	DATE	APPD	DATE
-	RELEASED FOR PRODUCTION	J. C. L.	3/4/96	J. C. L.	3/4/96
A	Revised Mat'ls & Plating; Added Environmentals; Redrawn	J. C. L.	7/18/01	J. C. L.	7/18/01
B	CHANGED PER CDC #30736	D. J. H.	9/18/09	J. D. B.	10/2/09

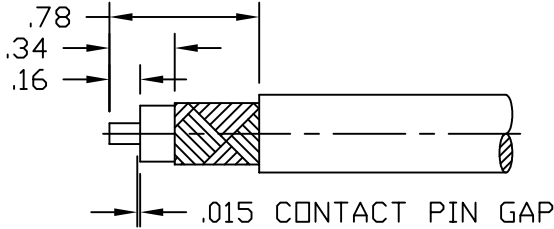

CABLE PREPARATION DETAIL  
(NOT TO SCALE)  
.429 HEX DIE  
CONNECTOR ADDS .75  
TO OVERALL ASSEMBLY LENGTH

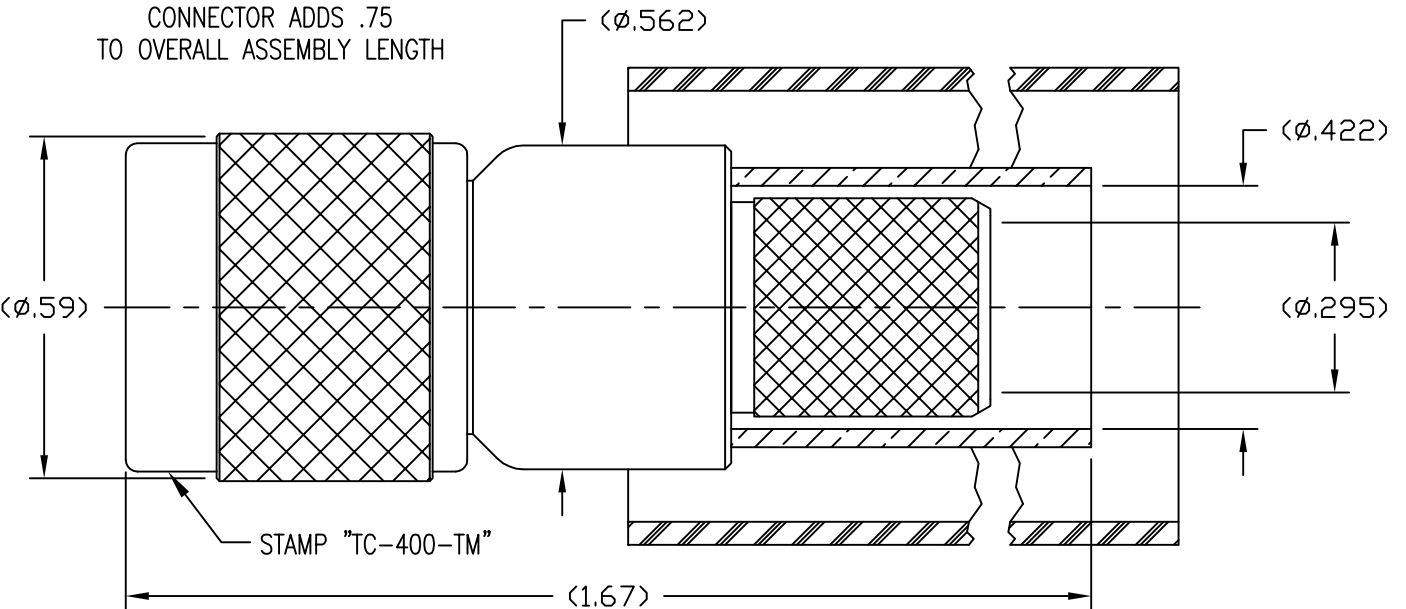

**Australian Representatives**  
**ROJONE, PTY LTD.**  
Tel: 02 9829 1555  
E: sales@rojone.com.au  
www.rojone.com.au

- |  |   |
|--|---|
| 1.0 PERFORMANCE  | 2.3 LOCKING RING: PHOSPHOR BRONZE, ASTM-B-159, ALLOY 510          |
| 1.1 FREQUENCY RANGE: DC-11GHz                            | 2.4 ALL OTHER METAL PARTS: BRASS PER ASTM-B-16                    |
| 1.2 VOLTAGE RATING: 500V RMS (sea level)                 | 2.5 GASKET: SILICON RUBBER, ZZ-R-765, GR. 50, RED                 |
| 1.3 NOMINAL IMPEDANCE: 50 OHMS                           | 2.6 SHRINK SLEEVE: THICK WALL POLYOLEFIN, MIL-I-23053/4, CLASS 3. |
| 1.4 DWV: 1500 V RMS @ 60 Hz (sea level)                  | 3.0 FINISHES  |
| 1.5 TEMPERATURE RANGE: -65°C TO +165°C                   | 3.1 CENTER CONTACT: SILVER PLATED                                 |
| 2.0 MATERIALS  | 3.2 ALL OTHER METAL PARTS: NICKEL PLATED                          |
| 2.1 DIELECTRIC: PTFE, ASTM-D-1710                        | 4.0 MECHANICAL  |
| 2.2 CRIMP FERRULE: DHP SOFT COPPER, CDA 122, SOFT TEMPER | 4.1 INTERFACE: IN ACCORDANCE WITH MIL-STD-348                     |

MATERIAL:	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES MACHINED SURFACES FINISH N/A RMS MAX. REMOVE ALL BURRS .005 MAX. BREAK MACHINE CORNERS .005 MAX. FILLET R. TOLERANCES ON DECIMALS .XX ± .03 .XXX ± .005 ANGLES ± 1° FRACTIONS ± 1/32	DFTM. J. C. L.	TIMES MICROWAVE SYSTEMS
		DATE 3/4/96	
USED ON: B		CHKD. J. C. L.	<b>TC-400-TM</b> "TNC" MALE, CRIMP FOR LMR-400 CABLE
		DATE 3/4/96	
SCALE: N/A	DWG. SIZE A	APPD. J. C. L.	SHEET 1 of 1
		DATE 3/4/96	
DO NOT SCALE DRAWING	CODE IDENT 68999	DATE 3/4/96	REV B